


4" 不锈钢膜壳-工业型

4" Membrane Housing- For Industry Use



参数概述/General Specifications

侧进水，侧口数量2-8只	Side Port, Qty: 2-8 pcs
最大工作压力：1000PSI	Max working pressure: 1000PSI
最大工作温度：90℃	Max working temperature: 90℃
壳体材质：不锈钢304/316L	Housing Material: SS304/316L
端盖材质：不锈钢304/316L	End cap material: ABS/SS304/316L
O型圈材质：EPDM, NSF级别	O-ring material: EPDM, with NSF certificate
表面处理： 机械抛光（320目，Ra<0.6）	Finish: Mechanical polishing (320 mesh, Ra<0.6)
连接形式	Connect type
--进/出水口：拷贝林	--F/C port: Victaulic coupling
--透过水口：内螺纹	-- Permeate port: female thread
型号：配4021/4040标准膜，可装1-3支	Model: for 4021/4040 element, of 1~3 pcs

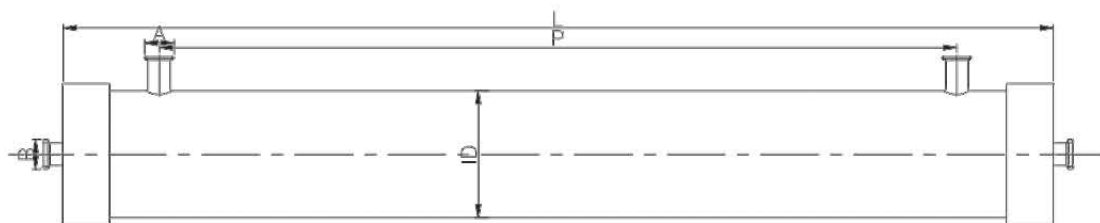

尺寸/Dimension

型号/Model	P(mm)	L(mm)	ID(mm)	A(inch)	B(inch)
JD-4021	533	681	Φ102	1-1.5"	1/2"
JD-4040-1	1016	1164	Φ102	1-1.5"	1/2"
JD-4040-2	2032	2180	Φ102	1-1.5"	1/2"
JD-4040-3	3048	3196	Φ102	1-1.5"	1/2"